



OMNI EZ HD TVI

 **KEZ-c2DI28V12**

1080p HD Over Regular Coax or UTP
Indoor Dome, Digital Day/Night, 3-Axis
2.8-12mm, Easy Twist & Lock Mount

1080p HD Over Regular Coax or UTP
Indoor Dome, Digital Day/Night, 3-Axis
2.8-12mm, Easy Twist & Lock Mount



Technical Specifications



Imaging Device	1/3" Sony 2.1Mp Progressive Scan CMOS
Video Format	Main Output: 1080p30/25, 720p60/50 HD-TVI (OSD selectable) Secondary Output: CVBS (OSD selectable NTSC/PAL) service video test point
Picture Elements	1984 (H) x 1105 (V)
Effective Picture Elements	1920 (H) x 1080 (V)
Horizontal Resolution	More than 1080 HTVL (in 1080p mode)
Sensitivity	.5 lux @ F1.6 (AGC On)
Day/Night Type	Digital Day/Night
Lens Type	2 Megapixel Varifocal Type 2.8~12mm F=1.6
Video Output Connector Type	TVI and CVBS: BNC 75Ω Test Video: CVBS video test point inside access cover, cable to BNC supplied
Sync. Mode	Internal
OSD Menu	Multiple functions using 3-axis joystick inside housing; UTC Control
OSD Languages	English, Spanish, Portuguese, German, Russian, Japanese, French
UTC Control	Full OSD Menu access via up-the-cable (Coaxitron® type) signaling
WDWR / BLC / HSBLC	OFF/WDWR/BLC/HSBLC Selectable
	Adjustable for Level 1~10; also BLC area, HLC color.
Auto Gain Control	OFF; 2~42dB
Electronic Shutter	Auto; FLK; or Manual 1/30 (25) to 1/30,000
White Balance	Auto / Push Lock / Manual
Color Correction	Gamma 0.45~.65, adjustable
Day & Night	Digital D/N; Optional color-only and B/W only modes under OSD control
Sens-Up	DSS low light boost Off/Auto 2X~16X*
3D-DNR	Off/Low/Mid/High
Digital Zoom	1X~8X
Defog	Off/Low/Mid/High
Mirror	Off / H-flip, V-flip, rotate
Motion Detection	Off/On for programmable zone with sensitivity adjust (pixel change detection)
Privacy Mask	Off/On with full programmability for 8 selectable zones
Lens Shading Compensation)	Off/Low/Mid/High
DPC (Defective Pixel Correction)	Off/On
Other OSD Functions	Camera Title with position, Font Color; Image Sharpness
Power Source	12VDC/24VAC
Power Consumption	12VDC: 230mA, 24VAC: 2.5W
Operating Temperature	-14 °F ~ 122 °F (-10 °C ~ 50 °C)
Environmental	Indoor, up to 80% RH
Mechanical	Three axis positioning; plastic housing with snap on cover; clear bubble for maximum light transmission, with integral liner to inhibit observation of camera direction; choice of black body (B suffix) and white body (W suffix)
Mounting	Included easy-mount twist-on plate (attach to surface; housing base locks to plate); or, mount camera directly to surface if desired. Optional rough-in box adapter with integral twist-on fits 1 or 2 gang boxes or 4" octagonal boxes
Dimensions	4.21" (107mm) diameter, 3.82" (97.1 mm) high With box adapter 5.91" (150mm) diameter x 4.18" (106.1mm) high
Weight	8 oz./ 0.5 lb. / 230 g
Mounting Options	Junction Box Adapter Plate KA-ICMP1
Certifications	CE / FCC / RoHS

Features

- Superlative HD resolution of 1080p Full HD or 720p HD for amazing image quality and
 - Useful digital zoom on live view and playback
 - Field select 1080p or 720p
 - Field select 30/25 Hz or 60/50 Hz
- Operation over 'almost any' wire
 - More than 1000 feet on standard RG59 coax
 - More than 1500 feet on RG6
 - More than 500 feet on UTP (one pair from a Cat5e cable, using optional KA-HDBAL1 balun pair).
- HD-TVI HD BNC main output
- CVBS analog service video output inside housing
 - Use standard hand held test monitors
 - Convenient aim and focus; ease of service
- 1/3" Sony progressive scan CMOS sensor with .5 lux native light sensitivity
- Varifocal Aspheric 2.8~12mm 2 Megapixel lens to capture the desired field of view
- Digital Day/Night low light operation plus Digital Slow Shutter low light enhancement*
- Simple and easy to use OSD setup menu
 - Local 3-axis joystick inside access cover
 - Up-the-cable control from OMNI EZHD recorders (or other compatible Coaxitron® control equipment)
 - Digital Wide Dynamic Range to handle the most challenging of bright or unbalanced lighting conditions
 - Programmable Back Light Compensation (BLC) and Highlight Suppression Back Light Compensation (HSBLC)
 - Adjustable 3D Noise Reduction to increase low light picture clarity and conserve DVR HDD disk space
 - Privacy masking for 8 configurable zones
 - Lens shading compensation for even exposure out to the lens periphery
 - Defog improves image contrast in the presence of haze or smoke that obscures image details
 - Image H/V flip and rotate, digital zoom and more
- Dual voltage 24VAC/12VDC operation with low current draw
- Choice of black or white plastic housing (2 models) to blend or contrast with the décor
- 3-Axis positioning for convenient wall or ceiling mounting
 - Easy-mount twist-on mounting plate (attach plate; housing covers/locks onto plate; or, mount directly on surface)
 - Optional KA-ICMP1 with integral twist-on for mounting to standard electrical boxes

*DSS levels above 4X should be used only after careful consideration of scene dynamics

Dimensions; Inches (mm)

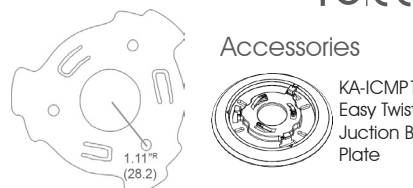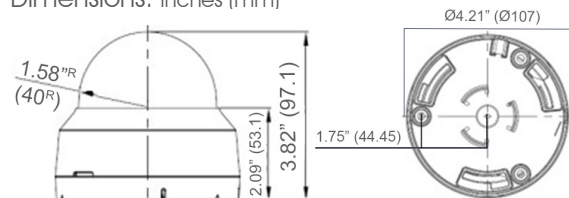

Accessories

KA-ICMP1
Easy Twist
Junction Box
Plate

